



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICANT(S): KRAUSZ, Eliezer et al. EXAMINER:

SERIAL NO.: 10/720,523

GROUP ART UNIT:

FILED: November 25, 2003

ATTORNEY DOCKET No.: P-5436-US

FOR: CLAMP TO ANODE CONNECTION


Commissioner for Patents
P. O. Box 1450
Alexandria, VA 22313-1450

SUBMISSION OF CERTIFIED PRIORITY DOCUMENT

Sir:

Applicant(s) hereby submits a certified copy of the Israel Application No. 153271 filed December 4, 2002 for the above identified patent application.

Respectfully submitted,

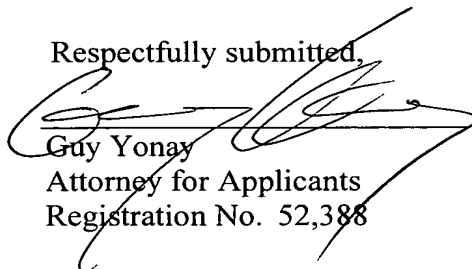
Guy Yonay
Attorney for Applicants
Registration No. 52,388

Dated: December 16, 2003

Eitan, Pearl, Latzer & Cohen Zedek, LLP.
10 Rockefeller Plaza, Suite 1001
New York, New York 10020
Tel: (212) 632-3480
Fax: (212) 632-3490




מדינת ישראל
STATE OF ISRAEL

Ministry of Justice
Patent Office

משרד המשפטים
לשכת הפטנטים

This is to certify that annexed
hereto is a true copy of the
documents as originally
deposited with the patent
application of which
particulars are specified on the
first page of the annex.

זאת לתעודה כי רצופים
בזה העתקים נכונים של
המסמכים שהופקדו
לכתחילה עם הבקשה
לפטנט לפי הפרטים
הרשומים בעמוד הראשון
של הנספח.

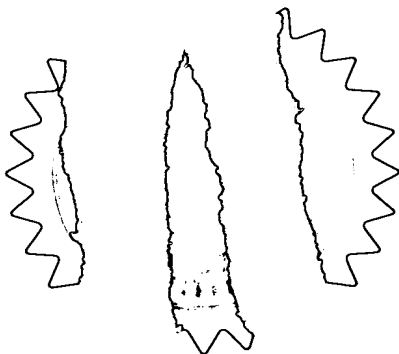

This 25-11-2003 היום
לשכת הפטנטים
רשם הפטנטים

Commissioner of Patents

נתאשר
Certified

בקשה לפטנט - Application For Patent

לשימוש הלשכה
For Office Use

מספר: Number	153271
תאריך: Date	04-12-2002
הוקדם/נדחה Ante/Post-dated	

KRAUSZ METAL INDUSTRIES LTD.
6 Hapatish Street
Tel Aviv 66559

Israeli Company

Inventors: Eliezer Krausz, Avi Chiproot

אני, (שם המבקש, מענו ולגבי גוף מאוגד - מקום התאגדותו)

I, (Name and address of applicant, and in case of body corporate - place of incorporation)

קראוס תעשיות מתכת בע"מ
רחוב הפטיש 6
תל אביב 66559

חברה ישראלית

מציאים: אליעזר קראוס, אבי צ'יפרוט

בעל אמצאה מכח הדין ששמה הוא


Owner, by virtue of the law of an invention the title of which is

חבור אנודה לחבק

(בעברית)
(Hebrew)

CLAMP TO ANODE CONNECTION

(באנגלית)
(English)
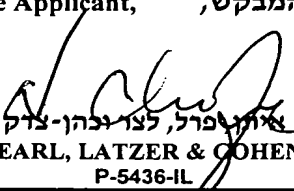
<p>*בקשת חלוקה - Application of Division</p> <p>*מבקשת פטנט from Application</p> <p>No.....מס' dated.....מיום</p>	<p>*בקשת פטנט מוסף - Application for Patent Addition</p> <p>*לבקשה/לפטנט to Patent/Appl.</p> <p>No.....מס' dated.....מיום</p>	<p>דרישה דין קדימה Priority Claim</p>		
<p>POA:</p> <p>הוגש בענין P.A.99229 המען למסירת מסמכים בישראל Address for Service in Israel</p> <p>איתן, פרל, לצר וכהן-צדק עורכי דין, עורכי פטנטים ונוטריון רח' שנקר 7, הרצליה 46725</p>		<p>מספר/סימן Number/Mark</p>	<p>תאריך Date</p>	<p>מדינת האגוד Convention Country</p>
<p>חתימת המבקש Signature of the Applicant</p> <p>עבור המבקש, , For the Applicant,</p> <p> EITAN, PEARL, LATZER & COHEN-ZEDEK P-5436-IL</p>		<p>היום 03 לחודש דצמבר שנת 2002 This 03 of December of the year 2002</p>		
		<p>לשימוש הלשכה For Official Use</p>		

טופס זה, כשהוא מוטבע בחותם לשכת הפטנטים ומושלים במספר ובתאריך ההגשה, הנו אישור להגשת הבקשה שפרטיה רשומים לעיל.
This form, impressed with the Seal of the Patent Office and indicating the number and date of filing, certifies the filing of the application the particulars of which are set out above.

* מחק את המיותר Delete whatever is inapplicable

CLAMP TO ANODE CONNECTION

חבור אנודה לחבק

The present invention relates to the corrosion protection of a steel pipeline, and to improvements in pipe clamps useful for this purpose.

More particularly, the invention provides a pipe clamp or coupling which makes electric contact with the pipes on which it is assembled and provides a continuous electrical connection, of the pipes.

Whether steel pipelines are placed underground or above ground, they are subject to corrosive attack. Below ground the steel is attacked by various soil substances, particularly carbonaceous materials and acid wastes. Above ground the typical causes of corrosion are atmospheric moisture in combination with various air pollutants.

A reliable method of resisting corrosion damage is to electrically connect the pipeline to a sacrificial zinc anode, the pipeline thus becoming the cathode. No power source is needed.

Piping, typically underground, may be protected by applying a DC potential of about 0.3V between the steel pipeline and a positive lead to the ground some distance away. For this a power source is required.

To provide an electric terminal on the pipeline for connection to whatever device is chosen, it is common practice to weld a metal strip thereto. This method requires welding equipment, weakens the pipe, and cannot be used proximate to inflammable materials, liquids or gases.

The following patents relate to cathodic protection of pipelines.

In US Patent no. 4,692,231 St. Onge discloses a cathodic protection system for metal piping using a sacrificial washer or nut to tighten a pipe joint. A non-sacrificing portion is needed to maintain mechanical connection after anode depletion. The system requires that at least one of the pipes be provided with a flange.

Webster in US Patent 4,863,578 proposes to protect an underground pipeline by means of a sacrificial anode encasing a core electrically connected to the structure. A corrodable link breaks the connection when the anode material is exhausted.

Persson discloses a method in US Patent no. 5,377,898 for bonding an anode sleeve to a pipe by detonation of an explosive charge within the pipe.

In US Patent no. 5,415,745 Pultan et al. disclose a method for cathodic protection of an underground pipeline by placing a hollow casing in the ground containing the anode and thereafter establishing an electrical connection.

A more complex method of providing cathodic protection for a pipeline is disclosed by Allebach et al in US Patent no. 6,238,545. As the system includes a power source, an electric connection to the sacrificial anode is specified.

It is therefore one of the objects of the present invention to obviate the disadvantages of prior art methods of forming a continuous electrical connections of pipelines for cathodic protection, and to provide a pipe clamp or coupling which provides a secure, robust and inexpensive arrangement for making electrical contact with such pipeline.

It is a further object of the present invention to secure the arcuate strip bridging the gap formed at the open section of the clamping band in a pipe coupling and to prevent said strip from moving out of position.

Yet a further aim of the present invention is to secure in position one end of a rubber mat used as a flexible sleeve in a pipe clamp or coupling.

The present invention achieves the above objects by providing, in a pipe clamp for sealing by means of a metal clamping band to surround the pipe or a pipe coupling for removably holding extremities of a pair of metallic pipes and a flexible inner sleeve disposed inside the clamping band; the improvement being the attachment of the inner sleeve to the clamping band by means of metallic fasteners, the metallic fasteners being arranged to contact the metallic pipes when the assembly is tightened, to form a continuous electrical connection of the pipes.

In a preferred embodiment of the present invention there is provided in a pipe clamp for sealing damaged pipes or a coupling for removably holding extremities of a pair of metallic pipes and a flexible inner sleeve disposed inside the clamping band, and being further provided with an arcuate strip bridging the gap formed at the open

section of the clamping band, the improvement being the attachment of the arcuate strip to the clamping band by any suitable means.

In a most preferred embodiment of the present invention there is provided a pipe clamp or coupling wherein the metallic fasteners retaining the arcuate strip are arranged to contact the metallic pipes when the assembly is tightened, to form a continuous electrical connection of the pipes.

It will thus be realized that the present invention serves to maintain the arcuate strip in its correct position, to compress the rubber inner sleeve also where there is a gap in the band clamp.

While the subject of the present invention is referred to as a pipe coupling, the same is also used for temporary repair of a leaking pipeline. Thus the words pipe coupling are intended to include use of the coupling for purposes of sealing a leak in a damaged pipeline.

The invention will now be described further with reference to the accompanying drawings, which represent by example preferred embodiments of the invention. Structural details are shown only as far as necessary for a fundamental understanding thereof. The described examples, together with the drawings, will make apparent to those skilled in the art how further forms of the invention may be realized.

In the drawings:

FIG. 1 is a perspective view of a preferred embodiment of the pipe clamp according to the invention;

FIG. 2 is a perspective detail view of an embodiment provided with an arcuate strip; and

FIG. 3 is a perspective view of an embodiment of the clamp having a second mode of an electric terminal.

There is seen in FIG. 1 a pipe clamp or coupling 10 for sealing or for removably holding extremities of a pair of metallic pipes 12. The clamp force is provided by a

metal clamping band 14 surrounding the pipe 12. A flexible inner sleeve 16 is disposed between the pipe 12 and the clamping band 14.

The inner sleeve 16 is attached to the clamping band 14 by means of a first plurality of metallic fasteners 18. The fasteners 18 are arranged to contact and press against the metallic pipe 12 when the band 14 is tightened, consequently forming a continuous electrical connection of the pipes. In one of our co-pending applications the sleeve is formed of a rolled-up mat. The fasteners 18 then serve to retain one of the ends of the mat in the correct position relative to the clamping band 14.

With reference to the rest of the figures, similar reference numerals have been used to identify similar parts.

Referring now to FIG. 2, there is again seen a pipe clamp or coupling 22. As in the previous figure a flexible inner sleeve 16 is disposed inside the clamping band 14. An arcuate strip 24 bridges the gap formed at the open section of the clamping band 14. The strip 24 applies pressure to that part of the flexible sleeve 16 which is not contacted by the clamping band 14.

FIG. 3 illustrates an embodiment of the pipe clamp 26 similar to that seen in FIG. 2 wherein a second plurality of metallic fasteners 28 retain the arcuate strip 24 in its correct position. It is within the scope of the invention to connect said strip 24 by means such as rivets, bolts welding and the like.

The scope of the described invention is intended to include all embodiments coming within the meaning of the following claims. The foregoing examples illustrate useful forms of the invention, but are not to be considered as limiting its scope, as those skilled in the art will readily be aware that additional variants and modifications of the invention can be formulated without departing from the meaning of the following claims.

WE CLAIM:

1. In a pipe sealing clamp or coupling for removably holding extremities of a pair of metallic pipes in axial sealing relationship by means of a metal clamping band to surround said pipes and a flexible inner sleeve disposed inside said clamping band; the improvement being the attachment of said inner sleeve to said clamping band by means of metallic fasteners, said metallic fasteners being arranged to contact said metallic pipes when said assembly is tightened, to form a continuous electrical connection of the pipes.
2. In a pipe sealing clamp or coupling for removably holding extremities of a pair of metallic pipes in axial sealing relationship by means of a metal clamping band to surround said pipes and a flexible inner sleeve disposed inside said clamping band, and being further provided with an arcuate strip bridging the gap formed at the open section of said clamping band, the improvement being the attachment of said arcuate strip to said clamping band by any suitable means.
3. The pipe clamp or coupling as claimed in claim 1 and 2 wherein said metallic fasteners are rivets.
4. The pipe clamp or coupling as claimed in claims 1 and 2 wherein said metallic fasteners are bolts or welded.
5. A pipe clamp or coupling for removably holding extremities of a pair of metallic pipes in axial sealing relationship substantially as described hereinbefore and with reference to the accompanying drawings.

For the Applicant

EITAN, PEARL, LATZER & COHEN-ZEDEK

Advocates, Patent Attorneys & Notaries

by: 

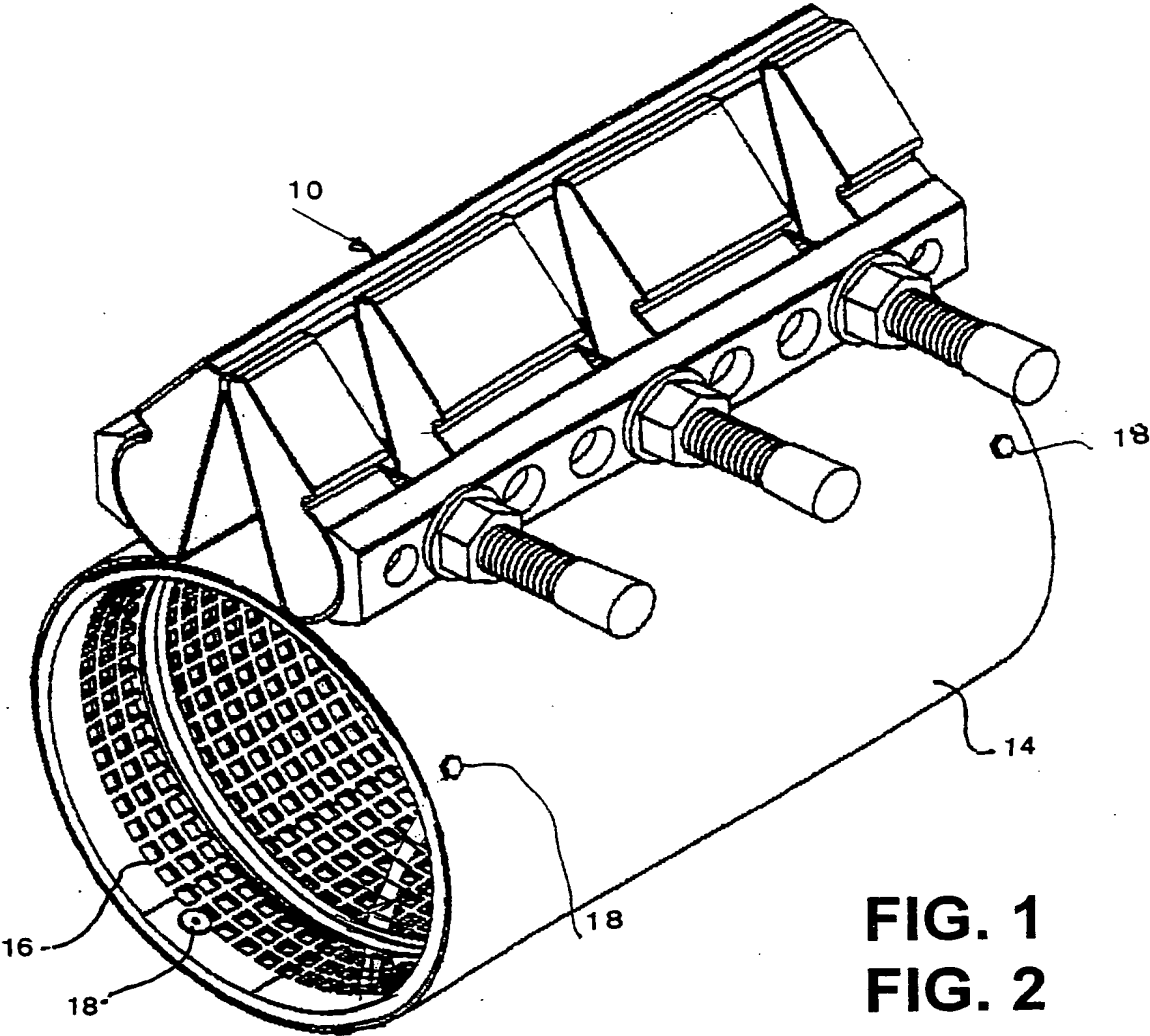
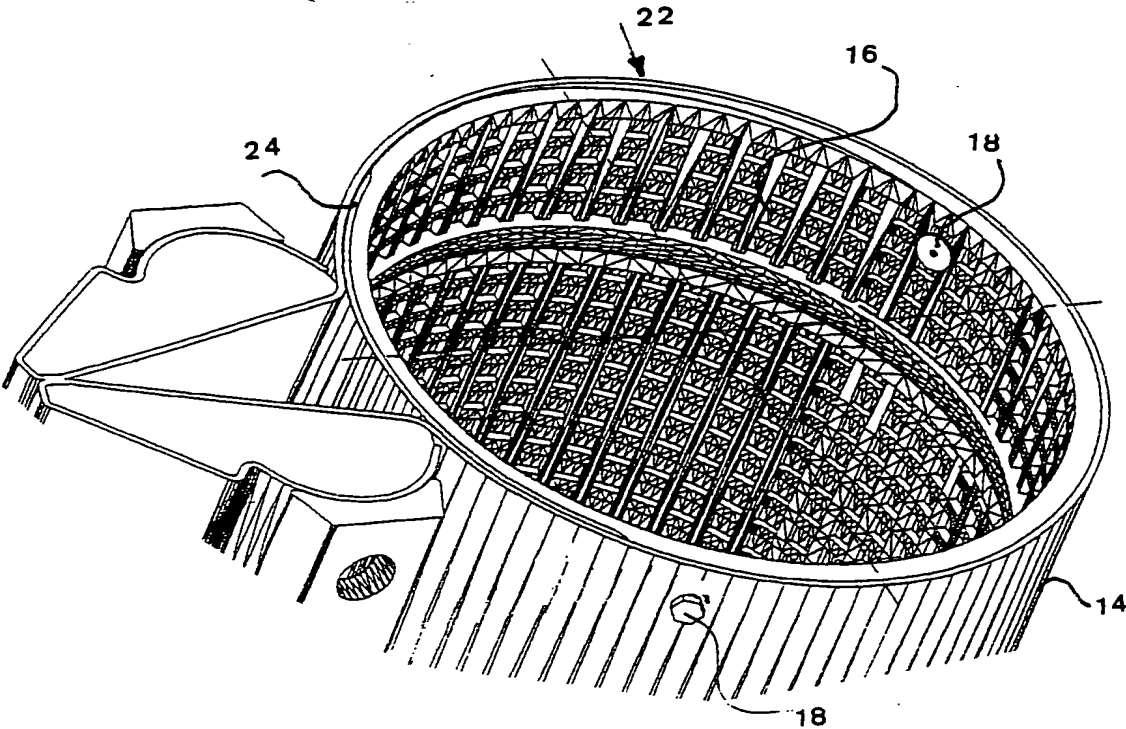


FIG. 1
FIG. 2



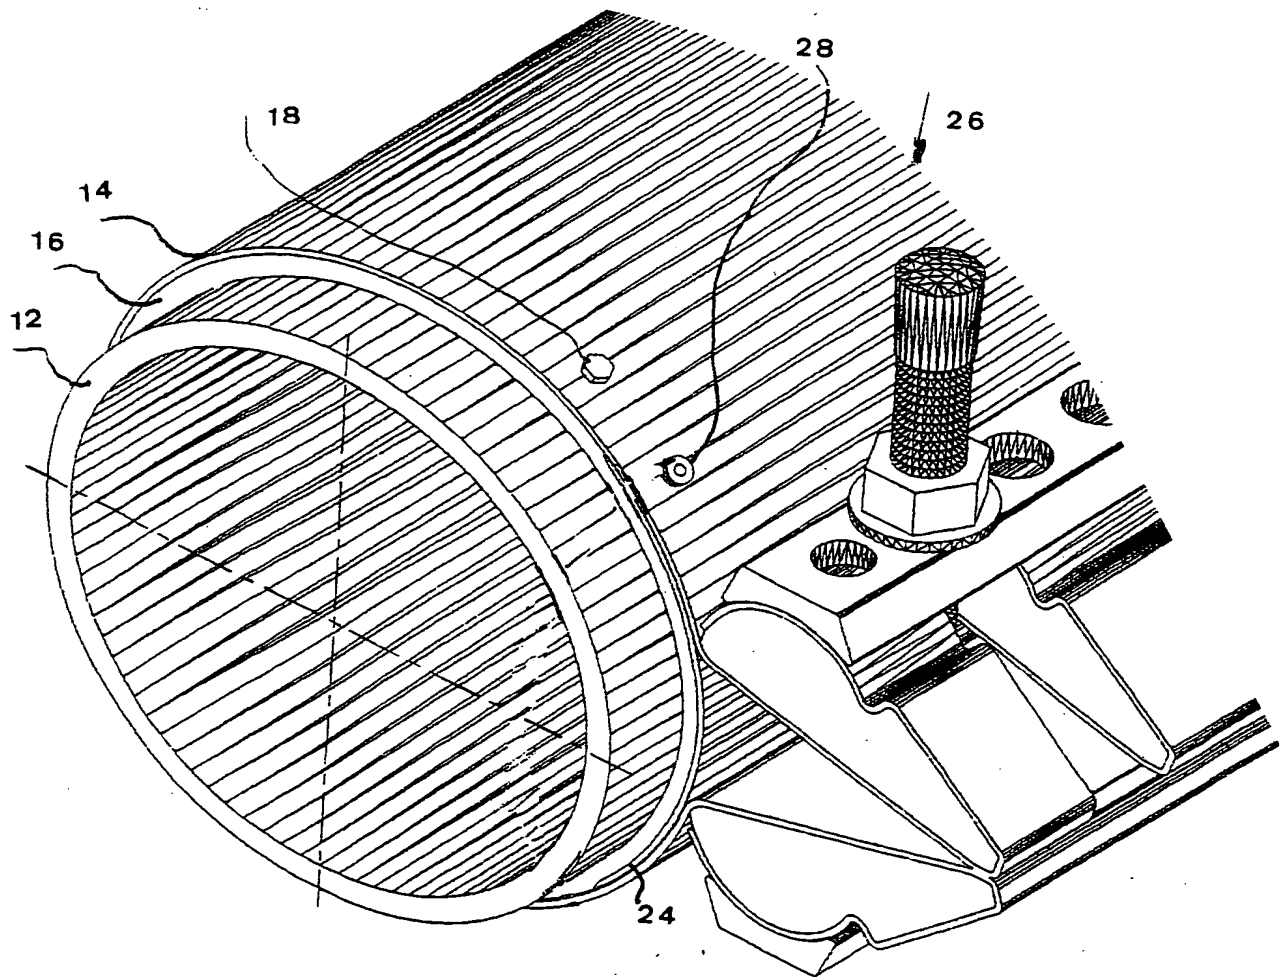


FIG. 3